


Checklist

- A** 2 x Sidebars
- B** 1 x Locking Bar
- C** 2 x Pipe Insert
- D** 1 length double spliced Rope
 - 2 x 4mm R Clips & 2 x 5mm R Clips
 - 2 x Shaft Locking Pins

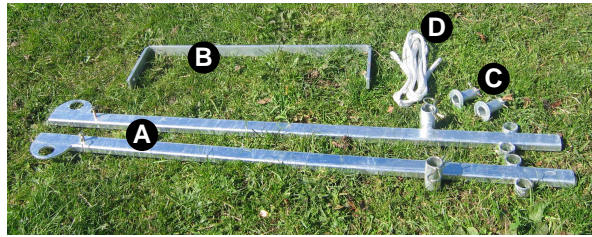

Assembly Instructions:

Step 1 Attach Side Bars

Place *Side Bar* **A** on inside side of Wrangler's first Rear Bar Profile. Insert and secure with *5mm R Clip*. Attach other *Side Bar* in the same manner.



Step 2 Insert Locking Bar

into end of *Side Bars*. **B**
Secure each side with *Shaft Locking Pin*.
Note: If holes don't line up well try flipping *Locking Bar*.



Step 3 Insert Wrangler Back Leg Bar

into *Side Bars* and secure with R Clip.



Step 4 Attach Rope

to top hook and pass around back leg bar.
Other end to be attached to calf



Step 5 Rotate Calving Attachment Up

ready for cow to walk into Wrangler